

## GENERAL FEATURES

- Environmentally friendly
- Able to operate at 60°C
- Integrated design to ensure the best uniformity and reliability
- Long life and high stability under high temp. environment (no air-con needed)
- Use super-C additives: Deep discharge recovery capability


## APPLICATIONS

- Solar & Wind energy system
- BTS Stations
- UPS system
- Telecom systems
- Wheel chair & Golf Car
- Marine Equipment
- Railway Systems



## DIMENSIONS & WEIGHT

|                  |         |
|------------------|---------|
| Length(mm)       | 260±1   |
| Width(mm)        | 180±1   |
| Height(mm)       | 246±1   |
| Total Height(mm) | 252±1   |
| Weight(kg)       | 30.2±3% |

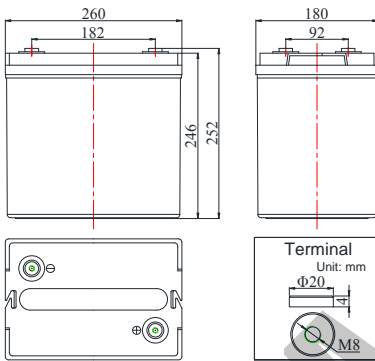

## COMPLIED STANDARDS

|                 |              |
|-----------------|--------------|
| IEC 60896-21/22 | JIS C8704    |
| YD/T799         | BS6290 part4 |
| GB/T 19638      | UL 1989      |

## TECHNICAL SPECIFICATIONS



|  |                             |   |
|--|-----------------------------|---|
| Nominal Voltage                                    |                             | 6V(3 cells per unit)  |
| Design Floating Life @25°C                         |                             | 15 Years  |
| Nominal Capacity @25°C (20 hour rate@11.3A,5.25V ) |                             | 226Ah   |
| Capacity @25°C                                     | 10 hour rate (20.57A,5.40V) | 205.7Ah   |
|  | 5 hour rate (33.40A,5.25V)  | 179.5Ah   |
|  | 1 hour rate (125.7A,4.80V)  | 125.7Ah   |
| Internal Resistance                                | Full Charged Battery@25°C   | ≤2.9mΩ  |
| Ambient Temperature                                | Discharge                   | -30°C~60°C  |
|  | Charge                      | -30°C~60°C  |
|  | Storage                     | -30°C~60°C  |
| Max.Discharge Current@25°C                         |                             | 2000A(5s)   |
| Capacity affected by Temperature (10 hr Capacity ) | 40°C                        | 108%  |
|  | 25°C                        | 100%  |
|  | 0°C                         | 90%   |
|  | -15°C                       | 70%   |
| Self-Discharge@25°C per Month                      |                             | 3%  |
| Charge (Constant Voltage) @25°C                    | Standby Use                 | Initial Charging Current Less than 40.7A<br>Voltage 6.8-6.9V  |
|  | Cycle Use                   | Initial Charging Current Less than 40.7A<br>Voltage 7.2-7.45V |

## BATTERY DISCHARGE TABEL

### Discharge Constant Current per Cell (Amperes at 25°C)







| F.V/Time | 15min | 30min | 45min | 1h    | 2h   | 3h   | 5h   | 8h   | 10h   | 20h   | 100h |
|----------|-------|-------|-------|-------|------|------|------|------|-------|-------|------|
| 1.60V    | 290.9 | 185.8 | 136.5 | 125.7 | 79.8 | 56.0 | 38.0 | 25.1 | 22.37 | 11.98 | 2.71 |
| 1.67V    | 285.7 | 182.4 | 134.0 | 123.2 | 78.2 | 54.9 | 37.3 | 24.6 | 21.92 | 11.75 | 2.67 |
| 1.70V    | 280.2 | 179.0 | 131.5 | 120.9 | 76.8 | 54.0 | 36.6 | 24.2 | 21.47 | 11.53 | 2.60 |
| 1.75V    | 275.0 | 175.6 | 129.0 | 118.7 | 75.3 | 52.9 | 35.9 | 23.7 | 21.24 | 11.30 | 2.55 |
| 1.80V    | 264.4 | 168.8 | 124.1 | 114.1 | 72.3 | 50.9 | 34.6 | 22.8 | 20.57 | 11.19 | 2.51 |

### Discharge Constant Power per Cell (Watts at 25°C)

| F.V/Time | 15min | 30min | 45min | 1h    | 2h    | 3h    | 5h   | 8h   | 10h  | 20h  | 100h |
|----------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|
| 1.60V    | 559.8 | 357.5 | 262.8 | 241.1 | 153.2 | 107.6 | 73.2 | 48.1 | 43.2 | 23.4 | 5.22 |
| 1.67V    | 549.6 | 351.0 | 257.9 | 236.8 | 150.5 | 105.8 | 71.9 | 47.5 | 42.3 | 22.9 | 5.11 |
| 1.70V    | 539.5 | 344.4 | 253.1 | 232.3 | 147.8 | 103.7 | 70.5 | 46.6 | 41.6 | 22.7 | 5.02 |
| 1.75V    | 529.3 | 337.9 | 248.4 | 228.0 | 144.9 | 101.7 | 69.2 | 45.7 | 40.7 | 22.4 | 4.93 |
| 1.80V    | 509.0 | 325.0 | 238.9 | 219.2 | 139.4 | 97.9  | 66.7 | 43.8 | 39.1 | 21.7 | 4.84 |

**Note** The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact MCA for the latest information.

PERFORMANCE CHARACTERISTICS

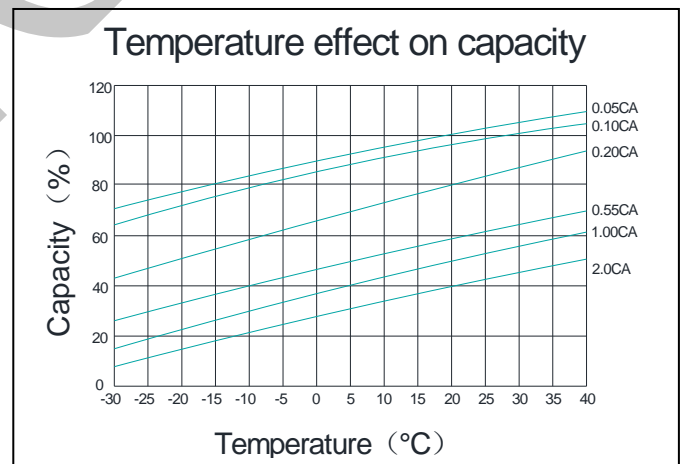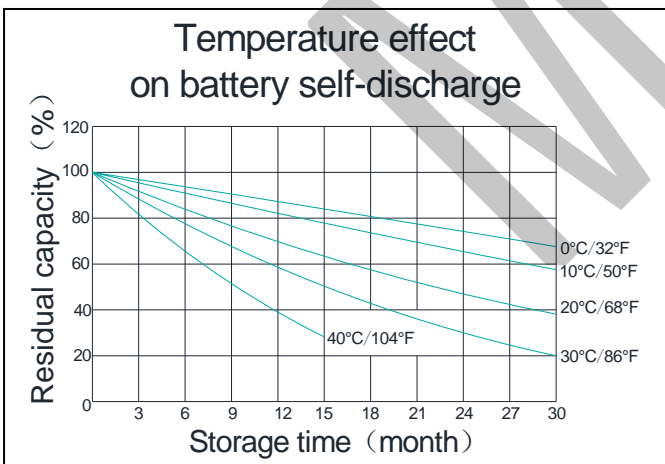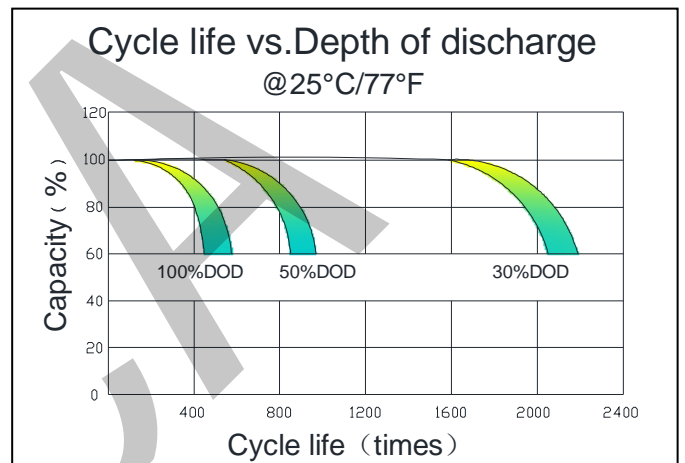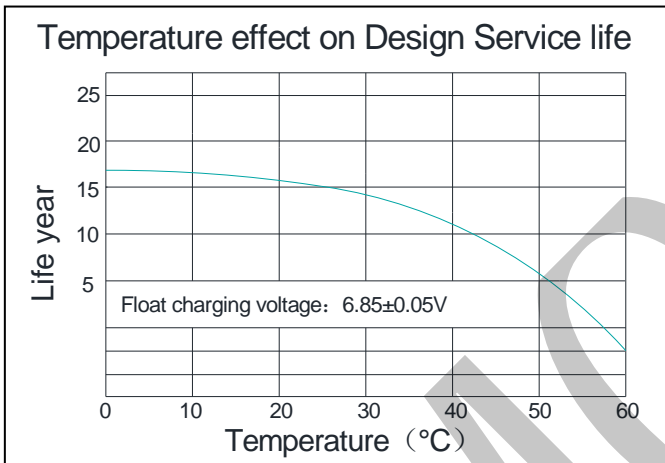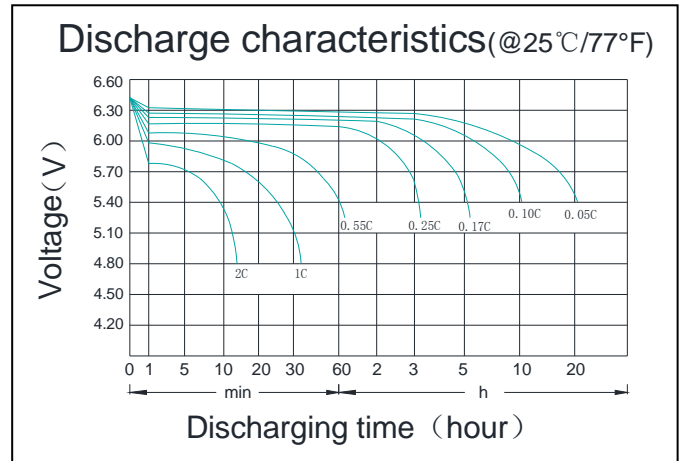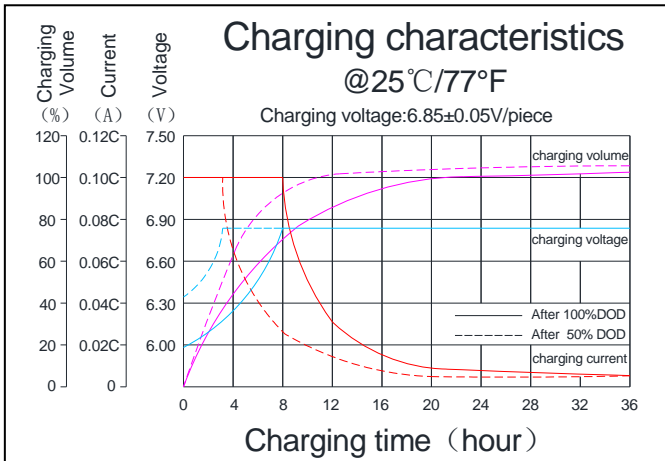

BATTERY CONSTRUCTION

| Component | Positive plate                               | Negative plate  | Container & Cover      | Safety valve                        | Terminal                                | Separator  | Electrolyte   | Pillar seal                 |
|-----------|--|---|------------------------|-------------------------------------|---|--|---|-----------------------------|
| Features  | Thick high Sn low Ca grid with special paste | Balanced Pb-Ca grid for improved recombination efficiency | ABS (UL94-V0 optional) | Flame Si-Rubbeand aging resistancer | Female Copper Insert M8(torque:7 ~9N.m) | Advanced AGM separator for high pressure cell design | Dilute high purity sulphuric acid with fumed Silica gel | Two layers epoxy resin seal |